

# ORDERING INFORMATION

To **CREIG** 330/299 0520


Both the CC and C type die cushions may be purchased as (1) cylinder assemblies only with mounting plates, or, (2) as complete installations including pressure pads, support plates, mounting bolts, surge tank and air controls.

Surge tanks and air controls are quoted separately when ordering cylinder assemblies only.

The Standard cushions referred to on these pages may be used with auxiliary locking devices or air boosters. They may

be used singly, tandem mounted or stacked as pictured on page 5. Press Equipment die cushions offer a wide range of cushion tonnages and capabilities to supply your exact needs.


## STANDARD MODEL "CC" TYPE

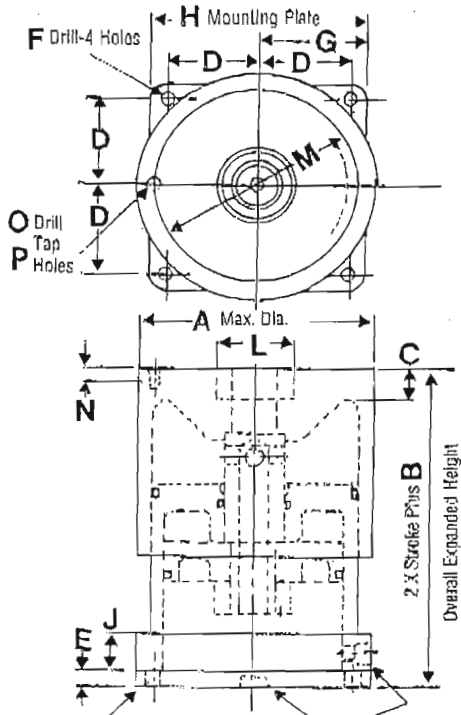

Size	10-8	12-10	14-12	16-14	18-16	20-18	22-20	24-22	26-24	28-26	30-28	34-31	38-35
A	11 1/2	13 1/2	16	18	20	22	24 1/4	26 1/4	28 1/4	30 1/2	32 1/2	37	41
B	12 1/2	13 1/8	14	14 5/8	16	18 1/4	22	22	23	24 1/2	25 1/2	28 1/4	29 7/8
C	2	2	2	2 1/4	2 1/4	2 1/2	3	3	3	3 1/4	3 3/8	4	4 1/4
D	4 1/2	5 1/4	6	6 3/4	7 3/4	8 1/2	9 1/2	11	11	12 1/2	13	15	17
E	1	1 1/8	1 1/4	1 3/8	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2	1 3/4	1 3/4	2	2 1/4
F	1 1/16	1 1/16	2 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16
G	5 1/4	6	6 3/4	8	8 3/4	9 1/2	10 1/4	12 1/4	12 1/4	14	14 1/2	16 1/2	18 1/2
H	10 1/2	12	13 3/4	16	17 1/2	19	21 1/2	24 1/2	24 1/2	26	29	33	37
J	2	2 1/4	2 1/2	3	3 1/2	3 1/2	4 1/2	4 1/2	4 1/2	4 3/4	4 3/4	6	6
K	1	1 1/4	1 1/4	1 1/2	1 1/2	2	2 1/2	2 1/2	2 1/2	2 1/2	3	3 1/2	4
L	4 1/2	4 1/2	4 1/2	5	5 1/2	6 1/8	7 1/8	7 1/8	7 1/2	8 1/4	8 3/8	8 3/8	8 1/8
M	9 1/4	11 1/4	12	14	16	20	21	23	25	28	29	33	37
N	1	1 1/4	1 1/4	1 1/4	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 3/4	1 3/4
O	1/2-10	3/4-10	3/4-10	3/4-10	3/4-10	1-8	1-8	1-8	1-8	1-8	1-8	1-8	1-8
P	4	4	4	4	4	6	6	6	6	6	6	6	6
R	32.5	42.5	52.5	60	67.5	75	90	97.5	105	120	140	190	215
Tons @ 100psi	6.4	9.5	13.3	17.7	22.7	28.4	34.7	41.8	49.1	57.3	66.1	83	104
Weight	300	420	600	770	960	1310	1900	2200	2660	3300	3820	5380	7750

Notes: Weight is based on 2" Stroke. Add 'R' pounds for each additional 2" of stroke.

## STANDARD MODEL "C" TYPE

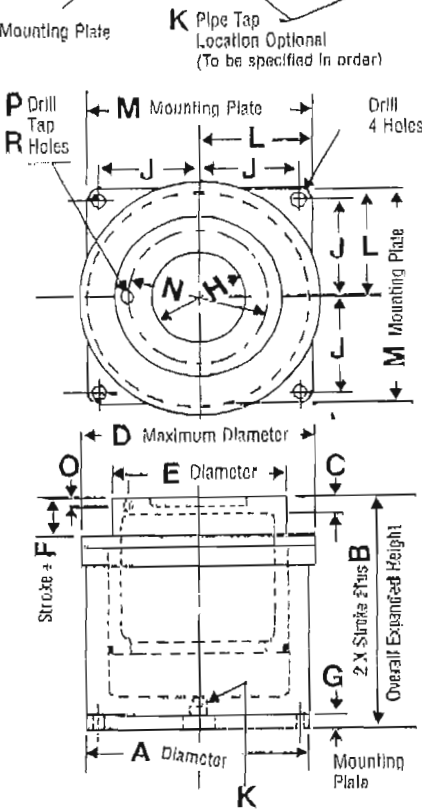

Size	12	14	16	18	20	22	24	26	28	30	32	34	36
A	14	15 3/4	18	20	22	24 1/2	26 1/2	28 1/2	30 1/2	32 1/2	34 1/2	36 1/2	38 1/2
B	12	12 1/8	14 1/8	15 7/8	18	18 3/8	20	20 5/8	21 1/8	23 1/8	24 1/8	25 3/8	26 3/8
C	2 1/4	2 1/2	2 5/8	2 3/4	3	3	3	3	3 1/8	3 1/4	3 1/4	3 1/2	3 1/2
D	14 1/2	16 1/2	18 1/2	21	23	25 1/2	28	29 1/2	31 1/2	33 1/2	35 1/2	37 1/2	39 1/2
E	11 1/8	13 1/8	15 1/2	17 1/8	19 1/2	21 3/8	23 3/8	25 3/8	27 1/4	29 1/4	31 1/4	33 1/4	35 1/4
F	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
G	1	1	1	1	1	1	1	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4
H	8 1/4	10 1/4	12 1/2	14 1/2	16 1/2	18 3/8	20 3/8	22 3/8	24	26	28	30	32
I	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16
J	5 1/2	6 3/4	7 3/4	8 3/4	9 3/4	10 3/8	12	13	14	15	16	17	18
K	1 1/4	1 1/4	1 1/2	2	2	2 1/2	2 1/2	3	3	3 1/2	3 1/2	4	4
L	7	8	9	10	11	12 1/8	13 1/4	14 1/4	15 1/4	16 1/4	17 1/4	18 1/4	19 1/4
M	14	16	18	20	22	24 1/4	26 1/2	28 1/4	30 1/2	32 1/2	34 1/2	36 1/2	38 1/2
N	10	11 3/4	14	16	18	20	22	24	25 5/8	27 5/8	29 5/8	31 5/8	33 5/8
O	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 3/8	1 3/8	1 3/8	1 3/8	1 3/8	1 3/8	1 3/8
P	1/2-11	3/4-11	3/4-11	3/4-11	1/2-11	5/8-11	3/4-10	3/4-10	3/4-10	3/4-10	3/4-10	3/4-9	1/2-9
R	4	4	4	4	4	4	4	4	4	6	6	6	6
S	97.5	42.5	57.5	62.5	70	87.5	97.5	105	110	120	130	140	150
Max. Cush. Stk.	6	6	6	8	10	10	12	12	14	14	14	14	14
Tons @ 100psi	5.6	7.7	10	12.7	15.7	19	22.6	26.5	30.8	35.4	40.2	45.1	50.9
Weight	370	460	630	820	1040	1360	1620	1800	2240	2640	2840	3280	3600

Notes: Weight is based on 2" stroke. Add "S" pounds for each additional 2" of stroke. Dimensions listed on this sheet good only to maximum cushion stroke listed above. Larger strokes available on request.